


SS6900 系列

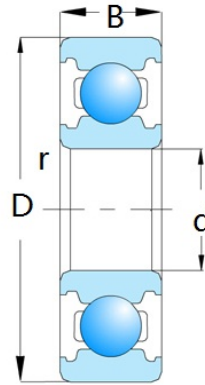

select	Inquiry	型号	d(mm)	D(mm)	B(mm)	动态载 荷(KN)	静态载 荷(KN)	极限速 度(r/min) (脂)	极限速 度(r/min) (油)	重 量(g)
S696 ZZ/2RS	6	15	5	1.48	0.6	32000	40000	0.0045		
S697 ZZ/2RS	7	17	6	1.6	0.71	30000	38000	0.0053		
S698 ZZ/2RS	8	19	6	2.25	0.92	28000	36000	0.0072		
S699 ZZ/2RS	9	20	6	2.45	1.05	27000	34000	0.0075		
S6900 ZZ/2RS	10	22	6	2.7	1.3	25000	32000	0.009		
S6901 ZZ/2RS	12	24	6	2.9	1.5	22000	28000	0.011		
S6902 ZZ/2RS	15	28	7	4.3	2.3	20000	26000	0.017		
S6903 ZZ/2RS	17	30	7	4.6	2.6	19000	24000	0.018		
S6904 ZZ/2RS	20	37	9	6.4	3.7	17000	22000	0.036		
S6905 ZZ/2RS	25	42	9	7	4.55	16000	19000	0.041		
S6906 ZZ/2RS	30	47	9	7.25	5	14000	17000	0.045		
S6907 Z7/2RS	35	55	10	10.9	7.75	12000	14000	0.073		

SS6900 系列

S6908 ZZ/2RS	40	62	12	13.7	9.95	11000	13000	0.112
S6909 ZZ/2RS	45	68	12	14.1	10.9	8500	11000	0.123
S6910 ZZ/2RS	50	72	12	14.5	11.7	8000	9500	0.138
S6911 ZZ/2RS	55	80	13	15.9	13.2	7500	9000	0.17
S6912 ZZ/2RS	60	85	13	16.4	14.2	6700	8000	0.181
S6913 ZZ/2RS	65	90	13	17.4	16	6300	7500	0.196
S6914 ZZ/2RS	70	100	16	23.7	21.2	6000	7000	0.336
S6915 ZZ/2RS	75	105	16	24.3	22.5	5600	6700	0.355
S6916 2RS	80	110	16	24.9	23.9	5300	6300	0.375
S6917 2RS	85	120	16	31.9	29.7	4800	6000	0.507
S6918 2RS	90	125	18	32.8	31.5	4500	5600	0.533
S6919 2RS	95	130	18	33.7	33.3	4300	5300	0.56
S6920 2RS	100	140	20	42.7	41.9	4000	5000	0.77
S6921 2RS	105	145	20	43.9	44.3	3800	4300	0.808
S6922 2RS	110	150	20	43.6	44.4	3600	4500	0.84
S6924 2RS	120	165	22	55	56.9	3200	4000	1.13
S6926 2RS	130	180	24	65.1	67.2	3000	3800	1.496
S6928 2RS	140	190	24	66.6	71.2	2800	3600	1.589